HYDRAULIC VALVE HV-200

The valve is a hydraulic valve with a diaphragm, which opens and closes using the pressure of the water in the network. Its constructive simplicity, which practically eliminates maintenance, classic diaphragm and spring system with wide use in the irrigation market.









MATERIAL CHARACTERISTICS

Body: made of cast iron **GGG50.**

Natural rubber diaphragm with interior textile reinforcement mesh, which provides high mechanical resistance and durability.

Internal and stainless steel spring SST302, nickel-plated steel screws.

OPERATING CHARACTERISTICS

Nominal body pressure: PN16.

Connections: 1-1/2" to 2" thread, 3" to 6" PN16 flange.

Working pressures: PN10 and PN16

MODELS

CODE	SIZE	CONNECTION	PN	RRP (€)
	40	1-1/2" THREAD	16	**78**
	50	2" THREAD	16	**80**
	80	3" FLANGE	16	**240**
	100	4" FLANGE	16	**280**
	150	6" FLANGE	16	**780**

ACCESSORIES



CODE	BAR	RRP (€)
11022036	0.8-6.5	**58**
11022053	0.5-3	**58**




SAGIV VALVE		
CODE	MODEL	RRP (€)
11028052	1/8"	**14.5**





LONG DISTANCE SOLENOID		
CODE	VOLTAGE	RRP (€)
11021039	LATCH	**48**
11021038	24/AC-DC	**52**

PRESSURE LOSS

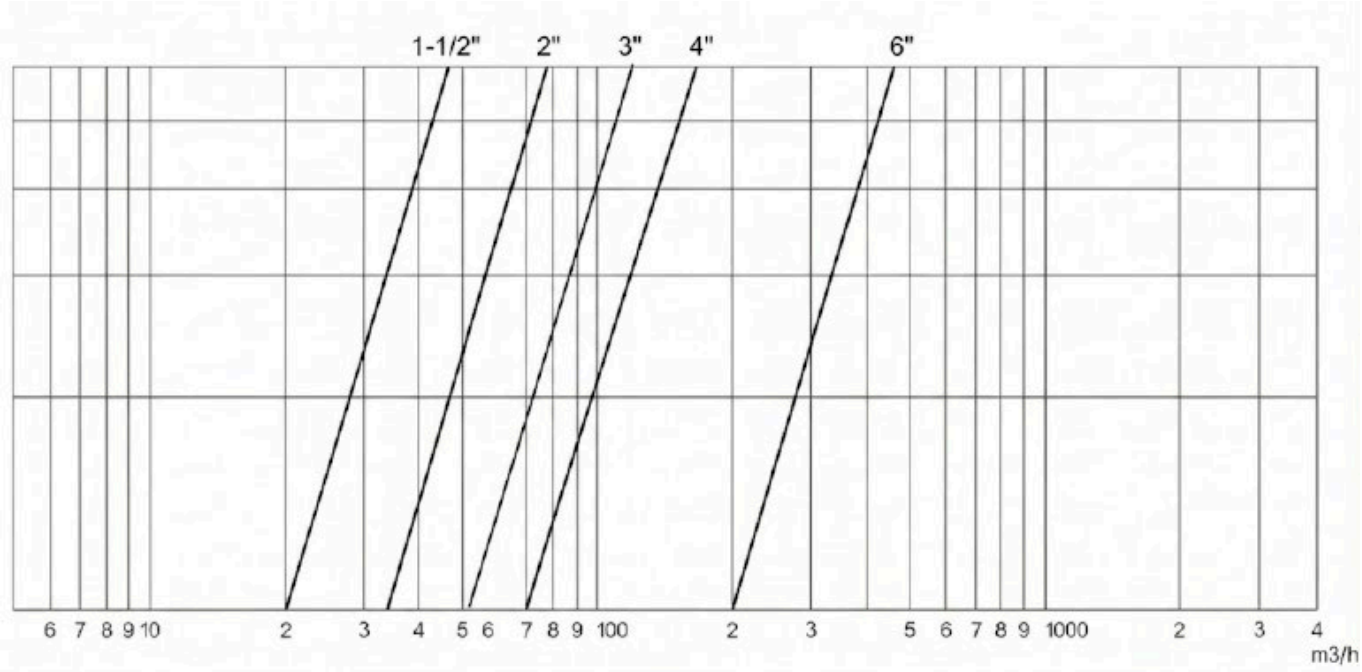

DIMENSIONS

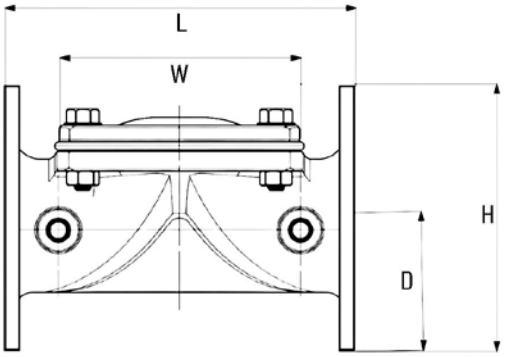

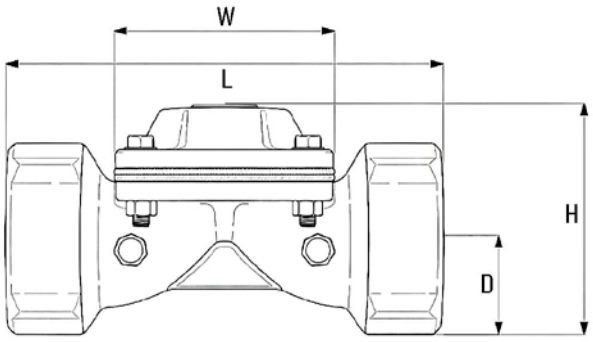

DN	L	H	D	W	KG
40 R	170	93	33	93	2,2
50 R	188	115	42	112	3,2
80 BR	285	200	105	200	17
100 BR	305	230	110	230	22
150 BR	390	314	145	300	46