MANUAL VALVE 3 WAYS

3 manual valve allows connecting any of the three ports to the common port, while the others remain sealed. Designed for manual hydraulic control in irrigation applications and industrial facilities.









MATERIAL CHARACTERISTICS

Body: Brass or plastic (depending on model)

Internal ball: Chrome steel

Lever: ABS

Threads: 1/8" - 1/4" BSP

OPERATING CHARACTERISTICS

Connection thread: Available in 1/4, 1/8 and 1/4" high flow connections

Position Settings: Open, Closed or Automatic by connecting to common port

Maximum pressure: 16 bar

MODELS

CODE	MATERIAL	CONNECTION MAIN	CONEXIÓN TOMAS	UNITS/BOX	RRP (€)
11028052	LATÓN	1/8"	1/8"	10	**14.5**
11028053	LATÓN	1/4"	1/8"	10	**14.5**
11028050	LATÓN	1/4"	1/4"	10	**30.5**
11028055	PLASTIC	1/8"	1/8"	10	**11**
11028064	PLASTIC	1/4"	1/8"	10	**11**

ACCESSORIES



TEFEN ACCESSORY

SEE PAGE




metal accessory

SEE PAGE



solenoid support		
CODE	**MODEL**	**RRP (€)**
14112001	SUPPORT	**40**

DIMENSIONS

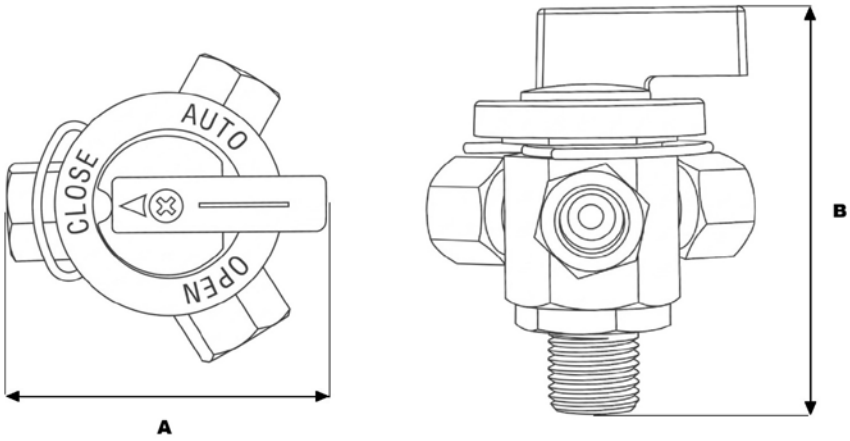

A	B	CONEXIÓN PRINCIAL	SOCKET CONNECTION
40	40	1/4"	1/8"
40	40	1/8"	1/8"
55	70	1/4"	1/4"