FILTRATION BANK BF-100

The automatic disc filter retains solid particles using discs. When a pressure drop is detected, the cleaning process is automatically activated, reversing the water flow to remove impurities.







MATERIAL CHARACTERISTICS

Filter: Polyamide reinforced with fiberglass.

Discs (filter discs): Polypropylene or polyamide.

Manifolds and connections: PP

Screws and metal parts: AISI 304 stainless steel.

Gaskets and seals: EPDM

Support: Painted carbon steel.

OPERATING CHARACTERISTICS

Maximum pressure: 8 bar

Minimum pressure: 1.5 bar

Washing flow: (1.5 bar) - 10m3 hour

Maximum working flow: It will depend on the model and the pressure loss tables.

MODELS

CODE	SIZE	CONNECTION (MM)	TYPE OF CONNECTION	M3/H	CM2	RRP (€)
12043060	1 UNIT - 2"	50	THREAD	20	1530	**1.650**

ACCESSORIES



CLEANING SCHEDULER

SEE PAGE



LONG DISTANCE SOLENOID


SEE PAGE




metal base solenoid

SEE PAGE

PRESSURE LOSS

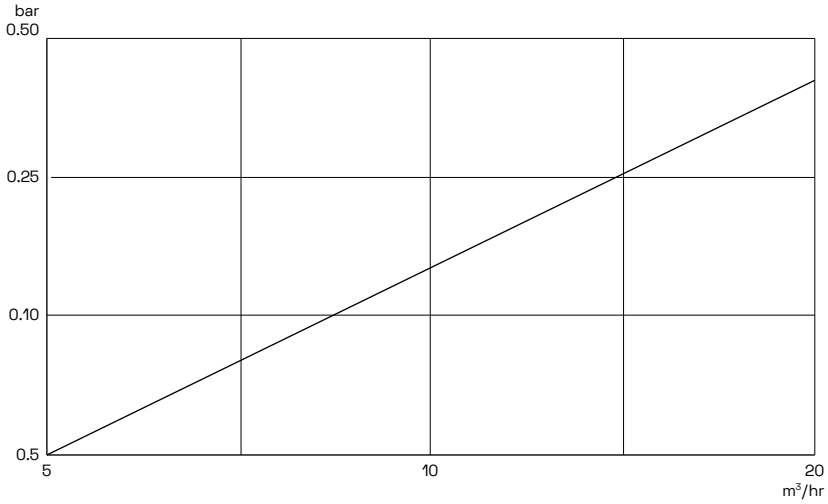

DIMENSIONS

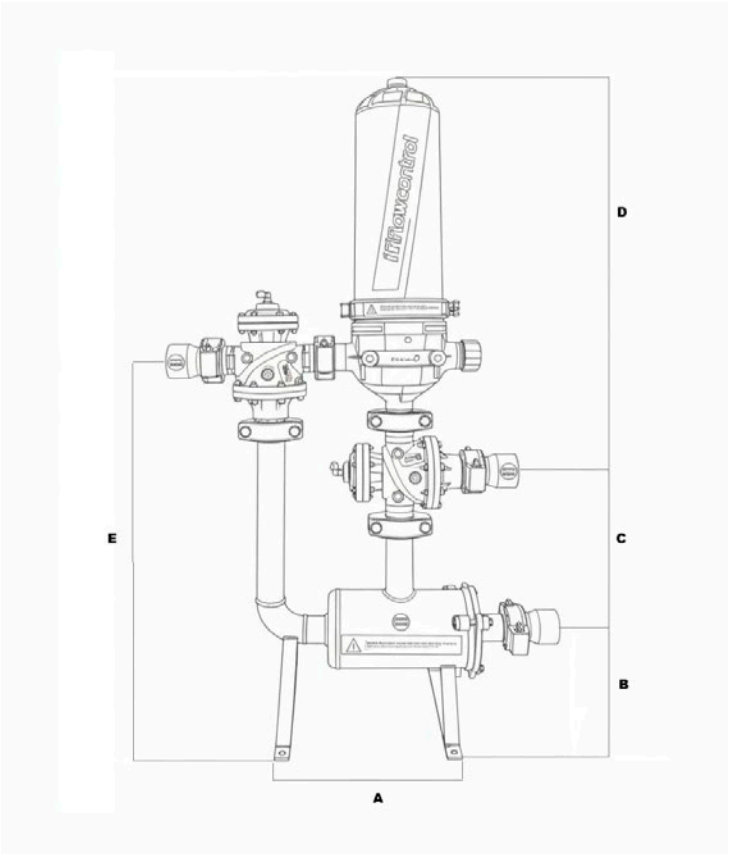

A	B	C	D	E
370	180	370	850	800

INFORMATION

