
ELECTROAGITATORS MX-150

The MX-150 12v/CD electric agitator is designed to mix fertilizers and chemicals in irrigation tanks. Prepared to resist corrosion from fertilizers, both the propeller and the shaft are made of stainless steel, its motor allows integration into solar energy installations.







MATERIAL CHARACTERISTICS

Shaft: Stainless steel 316

Support: PP

Bearing: Steel

Motor link: Nylon c fiberglass

Propeller: stainless 316

OPERATING CHARACTERISTICS

Motor 12VDC, 24VDC: 22 and 32 Maximum consumption amp.

Rotation Speed (RPM): Available options of 900 laps/min and 1400 laps/min.

Standard Axle: Axles available from 500 mm to 1400 mm (maximum standard length)

Long Axis (Reinforcement): From 1400 mm reinforcement guide

MODELS

EJE	GUIA	POWER	MATERIAL	CODIGO 12V/DC	RRP (€) 12V/DC	CODE 24V/DC	RRP (€) 24V/DC
1400		22AMP	INOX	**14111032**	**635**	**14111039**	**635**
1500	1400	22AMP	INOX	**14111033**	**735**	**14111040**	**735**
1600	1500	22AMP	INOX	**14111034**	**785**	**14111041**	**785**
1700	1600	22AMP	INOX	**14111035**	**835**	**14111042**	**835**
1800	1700	22AMP	INOX	**14111036**	**885**	**14111043**	**885**
1900	1800	22AMP	INOX	**14111037**	**935**	**14111044**	**935**

ACCESSORIES



STAINLESS LEVEL PROBE		
CODE	MODEL	RRP (€)
759000150	1,5M	**145**




DIGITAL ON - OFF TIMER		
CODE	MODEL	RRP (€)
11030036	12V DC	**100**



AGITATOR SUPPORT		
CODE	MODEL	RRP (€)
14112004	2 METERS	**160**

DIMENSIONS

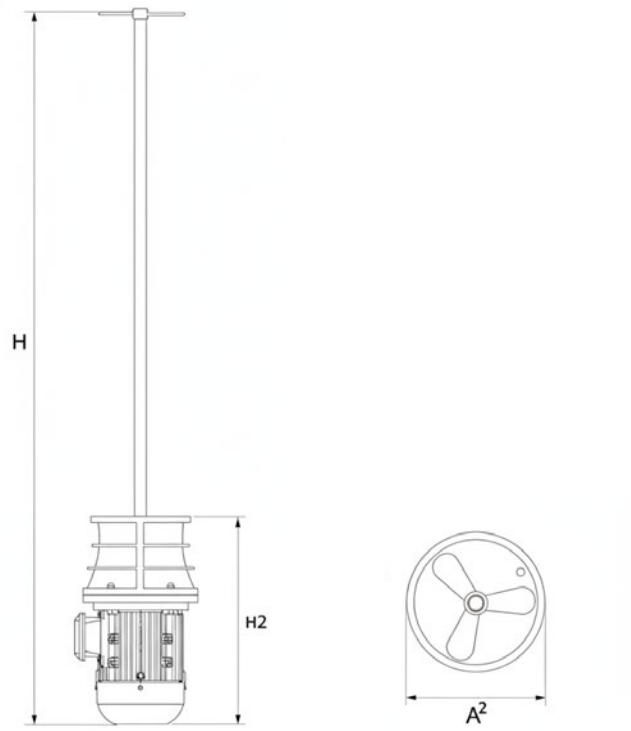

EJE	GUIA	A	H	H2	KG
1300	-	220	1670	370	13,5
1400	1300	220	1770	370	15.98
1500	1400	220	1870	370	16.17
1600	1500	220	1970	370	16.36
1700	1600	220	2070	370	16.55
1800	1700	220	2170	370	16.74
1900	1800	220	2270	370	16.93