
ELECTROAGITATORS MX-150 L

The MX-150 L 12v/CD electric agitator is designed to mix fertilizers and chemicals in irrigation tanks. Prepared to resist corrosion from fertilizers, both the propeller and the shaft are made of stainless steel, its motor allows integration into solar energy installations.





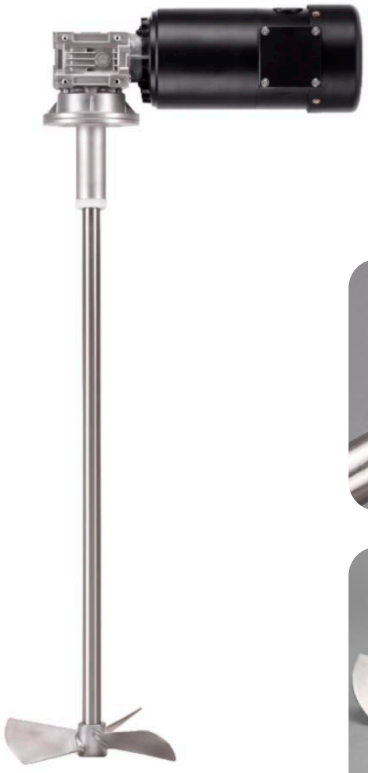

MATERIAL CHARACTERISTICS

Shaft: Stainless steel 316

Support: PP

Bearing: Steel

Motor link: Nylon with fiberglass

Propeller: ainless 316

Retention: OM

OPERATING CHARACTERISTICS

Motor 12VDC, 24VDC: 22 and 32 Maximum consumption amp.


Rotation Speed (RPM): 200 rpm options available

Standard Axle: Axles available from 500 mm to 1900 mm (maximum standard length).

MODELS

EJE	PROPELLER	POWER	MATERIAL	CODIGO 12V/DC	RRP (€) 12V/DC	CODE 24V/DC	RRP (€) 24V/DC
1400		22AMP	INOX	**14111057**	**698,5**	**14111063**	**698,5**
1500		22AMP	INOX	**14111058**	**808,5**	**14111064**	**808,5**
1600		22AMP	INOX	**14111059**	**863,5**	**14111065**	**863,5**
1700		22AMP	INOX	**14111060**	**918,5**	**14111066**	**918,5**
1800		22AMP	INOX	**14111061**	**973,5**	**14111067**	**973,5**
1900		22AMP	INOX	**14111062**	**1028,5**	**14111068**	**1028,5**

DIMENSIONS

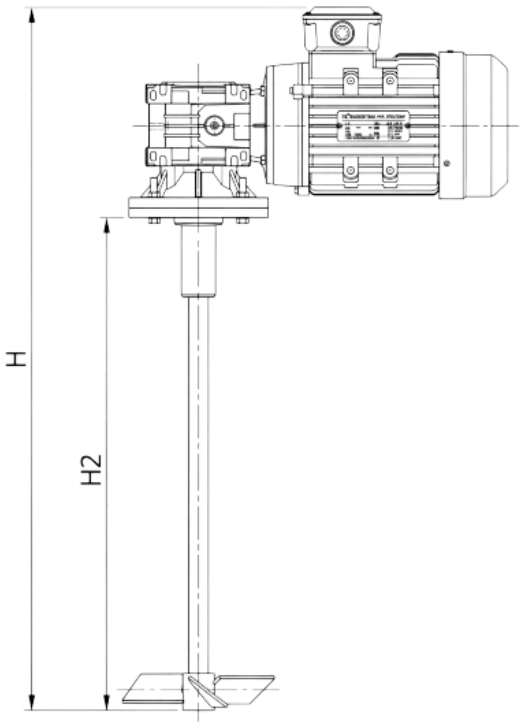

EJE	GUIA	A	H	H2	KG
1300					13,5
1400					15.98
1500					16.17
1600					16.36
1700					16.55
1800					16.74

ACCESSORIES



STAINLESS LEVEL PROBE		
CODE	MODEL	RRP (€)
759000150	1,5M	**145**



DIGITAL ON - OFF TIMER		
CODE	MODEL	RRP (€)
11030036	12V DC	**100**



AGITATOR SUPPORT		
CODE	MODEL	RRP (€)
14112004	2 METERS	**160**