SIDE WASH VALVE

The side flush valve is designed for drip irrigation installations that require automatic cleaning of the side section. At the beginning of each irrigation cycle, the lateral emptying is activated, eliminating sediments and ensuring the correct functioning of the system.







MATERIAL CHARACTERISTICS

Body AND LID: PP

Connectors: barbed connection 16mm

Internal gaskets: Elastomers resistant to chemicals and irrigation water

OPERATING CHARACTERISTICS

Working pressure: 0,5 to 3 bar

Empty time: 15 – 25 seconds

Discharge volume: 2 ,3 liters

Applications: For automatic cleaning of laterals in drip irrigation systems

MODELS

CODE	CONNECTION	RRP (€)
15156016	16MM TOOTHED WASH VALVE	**5,7**

ACCESSORIES



LINK		
CODE	MODEL	RRP (€)
15156007	16	**0,09**





VALVE		
CODE	MODEL	RRP (€)
15156024	16	**0,60**



STAKE		
CODE	MODEL	RRP (€)
15156020	16	**0,21**

DIMENSIONS

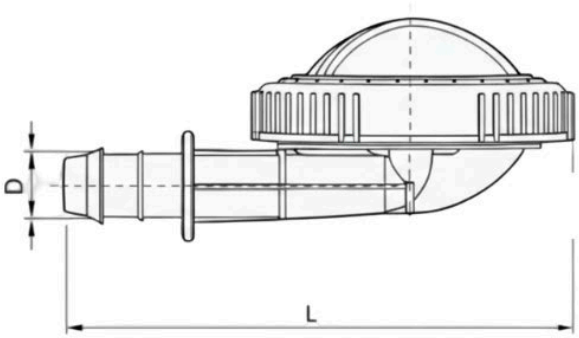

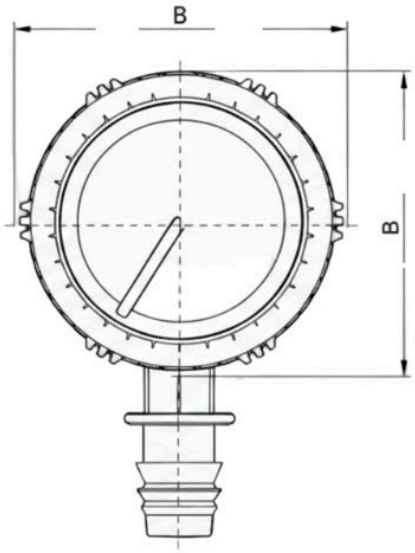

CONNECTION	L	D	B	(KG)
16	100	16	72	0.28