
SAFETY VALVE

The safety valve has a flat seat and direct spring, preventing overpressure from breaking the pipe, relieving water when it exceeds the trigger pressure that is regulated through the regulation screw, being fixed by the tightening lock nut.







MATERIAL CHARACTERISTICS

Body: Brass

Bell: Brass

Sealing gasket: PTFE

Spring: Steel

Regulation screw and locknut: AISI stainless steel 304

OPERATING CHARACTERISTICS

Designed to operate in a temperature range of 0 C to 80 C

Maximum Inlet Pressure: 12 bar

Regulation range: 2 to 8 bar

Threads: BSP

MODELS

CODE	SIZE	CONNECTION	PN	UNITS/BOX	RRP (€)
19192318	15	1/2”	16	1	**25,92**
19192013	20	3/4”	16	1	**54,31**
19192014	25	1”	16	1	**69,72**
19192015	30	1-1/4”	16	1	**114,23**
19192016	40	1-1/2”	16	1	**145,11**
19192017	50	2”	16	1	**201,92**


ACCESSORIES




BALL VALVE

SEE PAGE

PRESSURE LOSS

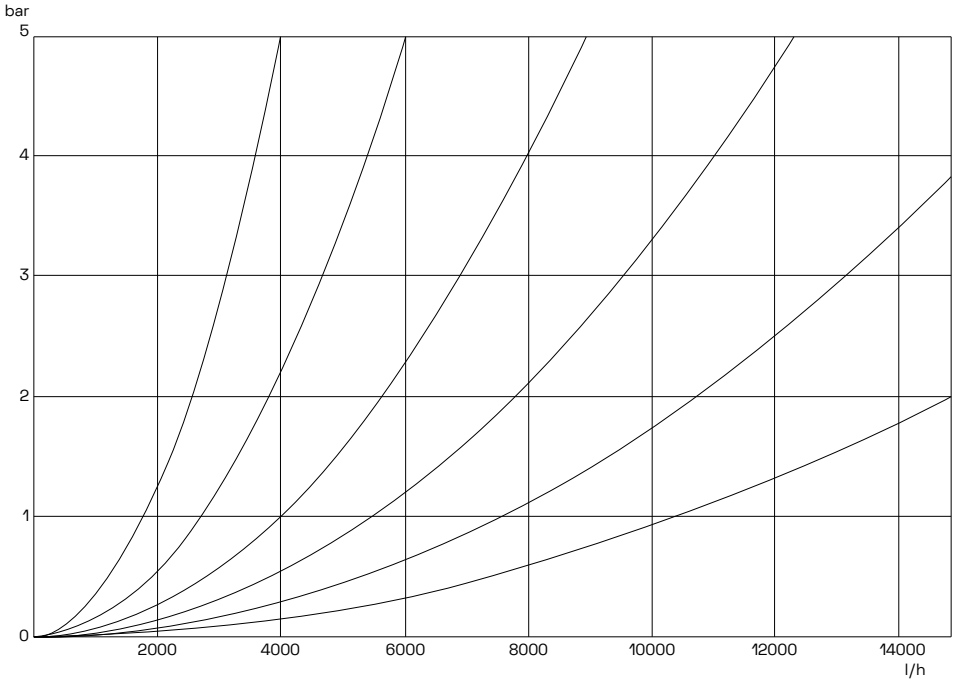

DIMENSIONS

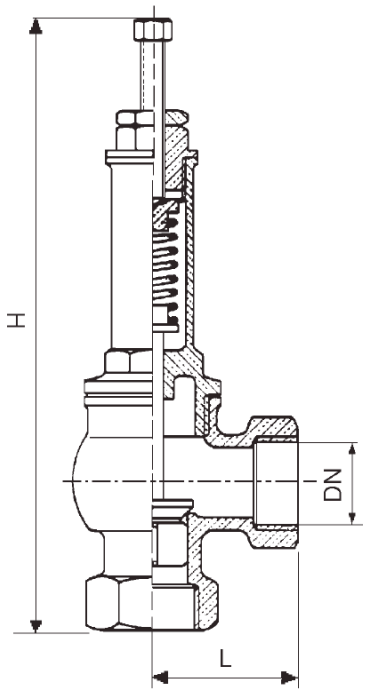

DN	H	L	HOLE Ø
1/2”	126	45	13
3/4”	145	56	19
1”	157	63	25
1 1/4”	189	78	31,5
1 1/2”	210	87	38